HSF

NOTES:
1. Insulator material: HIGH TEMPERATURE THERMOPLASTIC, UL94 V-0;
2. Terminal material: Copper Alloy;
Terminal Plating: Au/Sn Plated Over Nickel ;
3. Rated Voltage: 300 V;
4. Rated Current: 3.0 A;
5. Contact Resistance: 20 mΩ Max;
6. Insulation Resistance:
DC500V / 5000MΩ Min
7. Insulation Withstand Voltage:
1000V AC/1min;
8. Durability : 200 cycling;
9. Operation Temperature: -25℃ to +105℃;

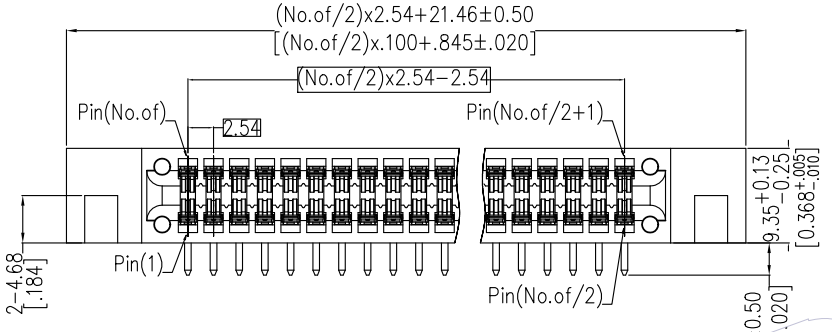

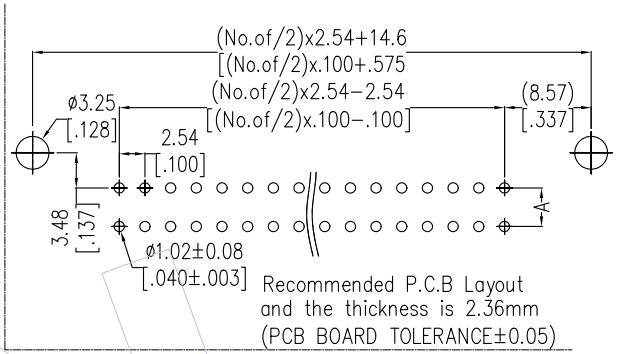

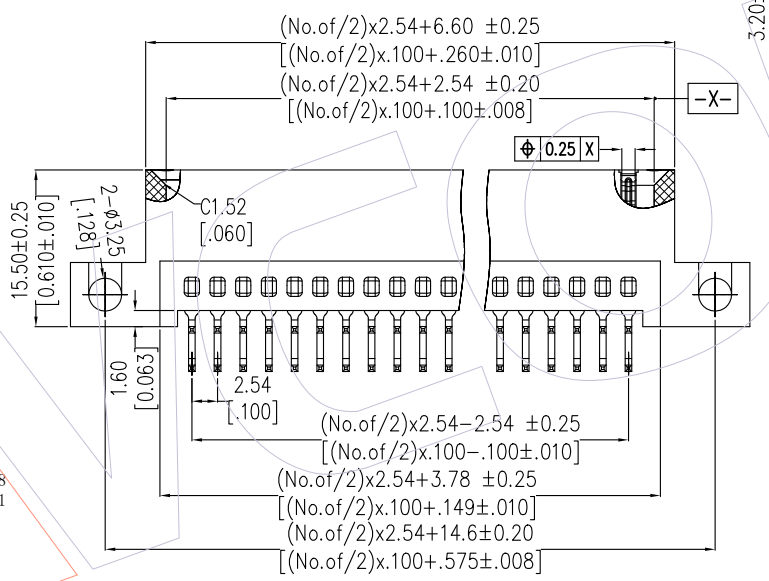

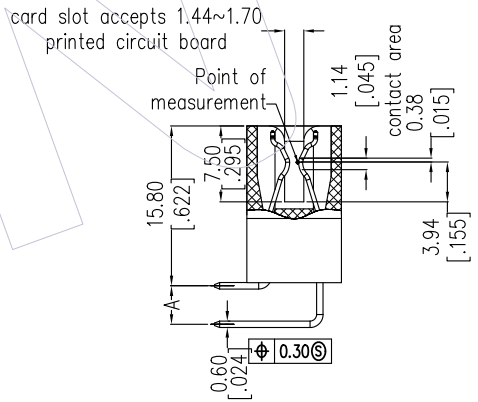

Ordering Information:

7512 - XXX R X W XX D 0X (A1)

- No. of: 006=6Pin ... 100=100Pin
- Fixed Mode: S: 180°DIP; R: 90°DIP; M: SMT; C: Splint
- Color: B: Black; W: White; W: 有定位孔
- Contact Plated: SM: Matte Tin; S0=Gold Flash/Tin; S1=3u" Gold /Tin; S5=30u" Gold /Tin; W0=Gold Flash /Matte Tin; W1=3u" Gold /Matte Tin; W5=30u" Gold /Matte Tin
- material: A: PBT; B: Nylon-66; D: LCP
- DIM. A脚距: 01: A=5.08; 02: A=3.81

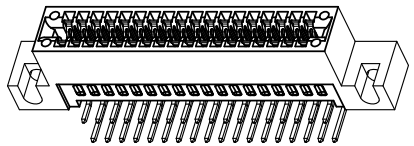

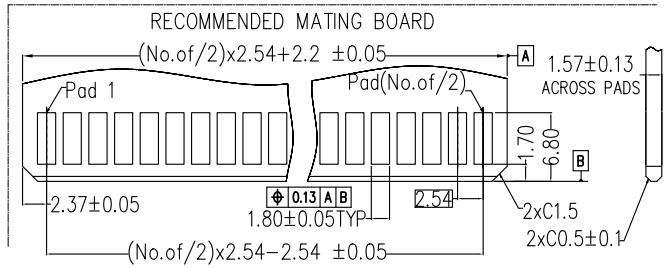

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	18/08/29	MODIFY P/N	------
A0	18/01/08	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Surong Xu	DATE	2018/08/29
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 7512-XXXRXWXXD0X (A1)

TITLE: 2.54mm Slot 90°DIP
脚距5.08/3.81 有定位孔

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com